


## Your mobile .....

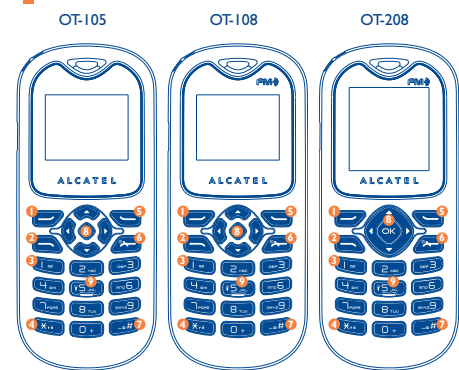

- 1 Left softkey
- 2 Call log (idle screen)  
Activate fake call (long keypress)  
Send call
- 3 Voicemail
- 4 Lock/Unlock
- 5 Right softkey
- 6 Power on/Power off  
End call  
Deactivate the Torch
- 7 Vibration alert
- 8 Navigation key :  
Menu/Confirm an option ○/◇
- 9 Profiles  
Organizer  
Create message  
Alarm  
Torch

Prolonged exposure to music at full volume on the music player may damage the listener's hearing. Set your phone volume safely. Use only headphones recommended by TCT Mobile Limited and its affiliates.

OT-105  
OT-108  
OT-208  
ALCATEL  
mobile phones

### 1.1 Keys

- Navigation key  
Confirm an option (press the middle of the key)  
Activate/Deactivate LCD backlights <sup>(1)</sup> (long keypress ○ in idle screen)  
Access favorite contact(s) <sup>(2)</sup> (long keypress ◇ in idle screen)
- Send call
- Access to call log (idle screen)
- Activate Fake call (long keypress)
- Power on/off the handset (long keypress)
- End call
- Return to idle
- Left softkey
- Right softkey
- Dial the voicemail number (long keypress)
- In edit mode  
- Short keypress: access the language list  
- Long keypress: enter zero
- In Edit mode:  
- Short keypress: change input methods  
- Long keypress: access the Symbols table
- From Idle screen  
- Short keypress: #  
- Long keypress: activate/deactivate the vibrator
- In edit mode:  
- Short keypress: ␣ (space)  
- Long keypress: add a word
- From Idle screen  
- Short keypress: dial '5'  
- Long keypress: switch on/off the torch

<sup>(1)</sup> OT-105/OT-108 only.  
<sup>(2)</sup> OT-208 only.

### 1.2 Idle screen icons

- Battery charge level.
- Vibration alert: your phone vibrates, but neither rings nor beeps.
- Headset connected <sup>(1)</sup>.
- Call forwarding activated: your calls are forwarded.
- Alarm clock programmed.
- Voicemail message arrived.
- FM radio is on <sup>(2)</sup>.
- Unanswered calls <sup>(2)</sup>.
- Roaming.
- Level of network reception.
- Silence mode: your phone neither rings, beeps nor vibrates.
- Message unread.
- Keypad locked.
- Stopwatch is active <sup>(2)</sup>.
- Ringtone alert.
- Vibration and ringtone alert <sup>(2)</sup>.

<sup>(1)</sup> OT-105/OT-108 only.  
<sup>(2)</sup> OT-208 only.

## 2 Getting started .....

### 2.1 Set-up

#### Removing and installing the back cover



#### Installing and removing the battery



#### Inserting and removing the SIM Card



Place the SIM card with the chip facing downwards and slide it into its housing. Make sure that it is correctly inserted. To remove the card, press it and slide it out.

### 2.2 Power on your phone

Hold down the key until the phone powers on.

### 2.3 Power off your phone

Hold down the key from the idle screen.

## 3 Calls .....

### 3.1 Making a call

Dial the desired number then press the key to place the call. If you make a mistake, you can delete the incorrect digits by pressing the right softkey.

To hang up the call, press the key.

#### Making an emergency call

If your phone is covered by the network, dial emergency number and press the key to make an emergency call. This works even without a SIM card and without typing the PIN code or unlocking the keypad.

### 3.2 Calling your voicemail <sup>(1)</sup>

To access your voicemail, hold down the key.

### 3.3 Receiving a call

When you receive an incoming call, press the key to talk and then hang up using the key.

### 3.4 Available functions during the call

During a call, you can use your directory, short messages, etc. without losing your correspondent.

## 4 Call register .....

### 4.1 Unanswered

In this menu, you can find the unanswered calls list.

### 4.2 Outgoing calls

In this menu, you can find the outgoing calls list.

### 4.3 Answered calls

In this menu, you can find the answered calls list.

### 4.4 My numbers

Type in or modify your telephone number or the number to access your voicemail and confirm by pressing /◇. Your telephone number is usually written on your SIM card.

### 4.5 Billing

You can access different items with this option: Amount, Duration.

### 4.6 Call settings

You can access a number of items with this option: Caller ID, Call waiting, Call forward, Answer mode, Call barring...

### 4.7 Call control <sup>(1)</sup>

The menu serves you the dual purposes of cost monitoring and controlling during a call by the settings of "By cost" and "By duration".

<sup>(1)</sup> Contact your network operator to check service availability.

<sup>(1)</sup> Depending on your network operator.

## 5 Directory .....

### 5.1 Consulting your directory

To access the **directory** from the idle screen, press the /◇ key and select the icon from the menu.

### 5.2 Adding a contact

Select the directory in which you wish to create a file, press the "Options" softkey, select "Add contact" then /◇.

## 6 Messages .....

### 6.1 Create SMS

From the main menu select "Messages" to create text message. You can type a message, and you're also able to insert a pre-defined message from "Templates". While writing a message, select "Options" to access all the messaging options. You can save your messages that you send often to "Drafts".

## 7 Settings .....

From the idle screen, select the icon menu and select the function of your choice in order to customise your telephone: Display, Clock, Keys, Power saving <sup>(1)</sup>, Dictionary, More settings...

## 8 Tools <sup>(1)</sup> Games & Tools <sup>(2)</sup> ....

### 8.1 Games <sup>(2)</sup>

Your Alcatel phone includes some games. Select "Game settings", it allows you to manage settings, in which you may set background audio and vibration alert.

### 8.2 Organizer

Once you enter this menu, there is a monthly-view calendar for you to keep track of important appointments, etc. Days with events entered will be marked.

### 8.3 Stopwatch

Stopwatch is simple application for measuring time with possibility to register several results and suspend/resume measurement.

<sup>(1)</sup> OT-105/OT-108 only.  
<sup>(2)</sup> OT-208 only.

### 8.4 Alarm

Your mobile phone has a built-in alarm clock with snooze feature.

### 8.5 Calculator

Hold down the # key to get the decimal point. Confirm with the /◇ key or the left softkey.

### 8.6 Converter

Unit converter and Currency converter.

### 8.7 Fake Call

Protect yourself from annoying situations with the "Fake Call". In this menu, you can set "Caller's name", "Call time" and "Ring tone". When the timer reaches, the phone will ring and display like receiving a real phone call. Press key, pretend answering a call, the screen will display just like have an ongoing call. Press key, pretend reject the call, the call will terminate automatically.

### 8.8 Torch

To light in darkness, you may activate "Torch" by below operations:  
In idle screen, long keypress key to activate the Torch light; short keypress key or Long keypress key to deactivate it.

## 9 Games <sup>(1)</sup> .....

Your Alcatel phone may include some games.

### 9.1 Game settings

It allows you to manage settings, in which you may set background audio and vibration alert.

## 10 FM Radio <sup>(2)</sup> .... <sup>(3)</sup> <sup>(4)</sup>

Your phone is equipped with an FM radio <sup>(3)</sup> with RDS functionality. You can use the application as a traditional FM radio with automatic tuning and saved channels or with parallel visual information related to the radio program on the display, if you tune to stations that offer Visual Radio service. You can listen to it while running other applications.

## 11 My shortcuts.. <sup>(1)</sup> <sup>(4)</sup>

Access the shortcuts already programmed. To programme new shortcuts: select "Add" if you want to create a quick access to functions, Numbers, Channel list <sup>(2)</sup>, etc.

<sup>(1)</sup> OT-105/OT-108 only.  
<sup>(2)</sup> OT-108/OT-208 only.  
<sup>(3)</sup> OT-108 only.  
<sup>(4)</sup> OT-208 only.  
<sup>(4)</sup> The quality of the radio depends on the coverage of the radio station in that particular area.

## 12 Profiles .....

With this menu, you may personalise ringtones for different events and environments.

## 13 Services .....

Contact your network operator to check service availability.

## 14 Latin input mode .....

To write messages, there are two writing methods:  
- Normal: this mode allows you to type a text by choosing a letter or a sequence of characters associated with a key. Press the key several times until the desired letter is highlighted. When you release the key the highlight character is inserted into the text.  
- Predictive with the Zi mode: this mode speeds up the writing of your text. Write the word by pressing a key between and . Press the key once and the word will be modified each time you press a key. As you go on, the word will keep changing.  
Example: For "Tomorrow", press on the following keys:  
 , = To  
 , = To  
 , = To  
-> tomorrow  
- + key in edit mode  
Short keypress: access the language list  
Long keypress: enter zero

ALCATEL is a trademark of Alcatel-Lucent and used under license by TCT Mobile Limited.  
All rights reserved © Copyright 2010 TCT Mobile Limited.  
TCT Mobile Limited reserves the right to alter material or technical specification without prior notice.

